

FIGURE 1

Figure 1 (above) shows the typical arrangement, with four inputs into the NMEA 0183 multiplexer. Figure 2 (at left) uses cascaded multiplexers to connect more than four devices. Figure 3 (bottom) shows the AIS being used as pass-through device.

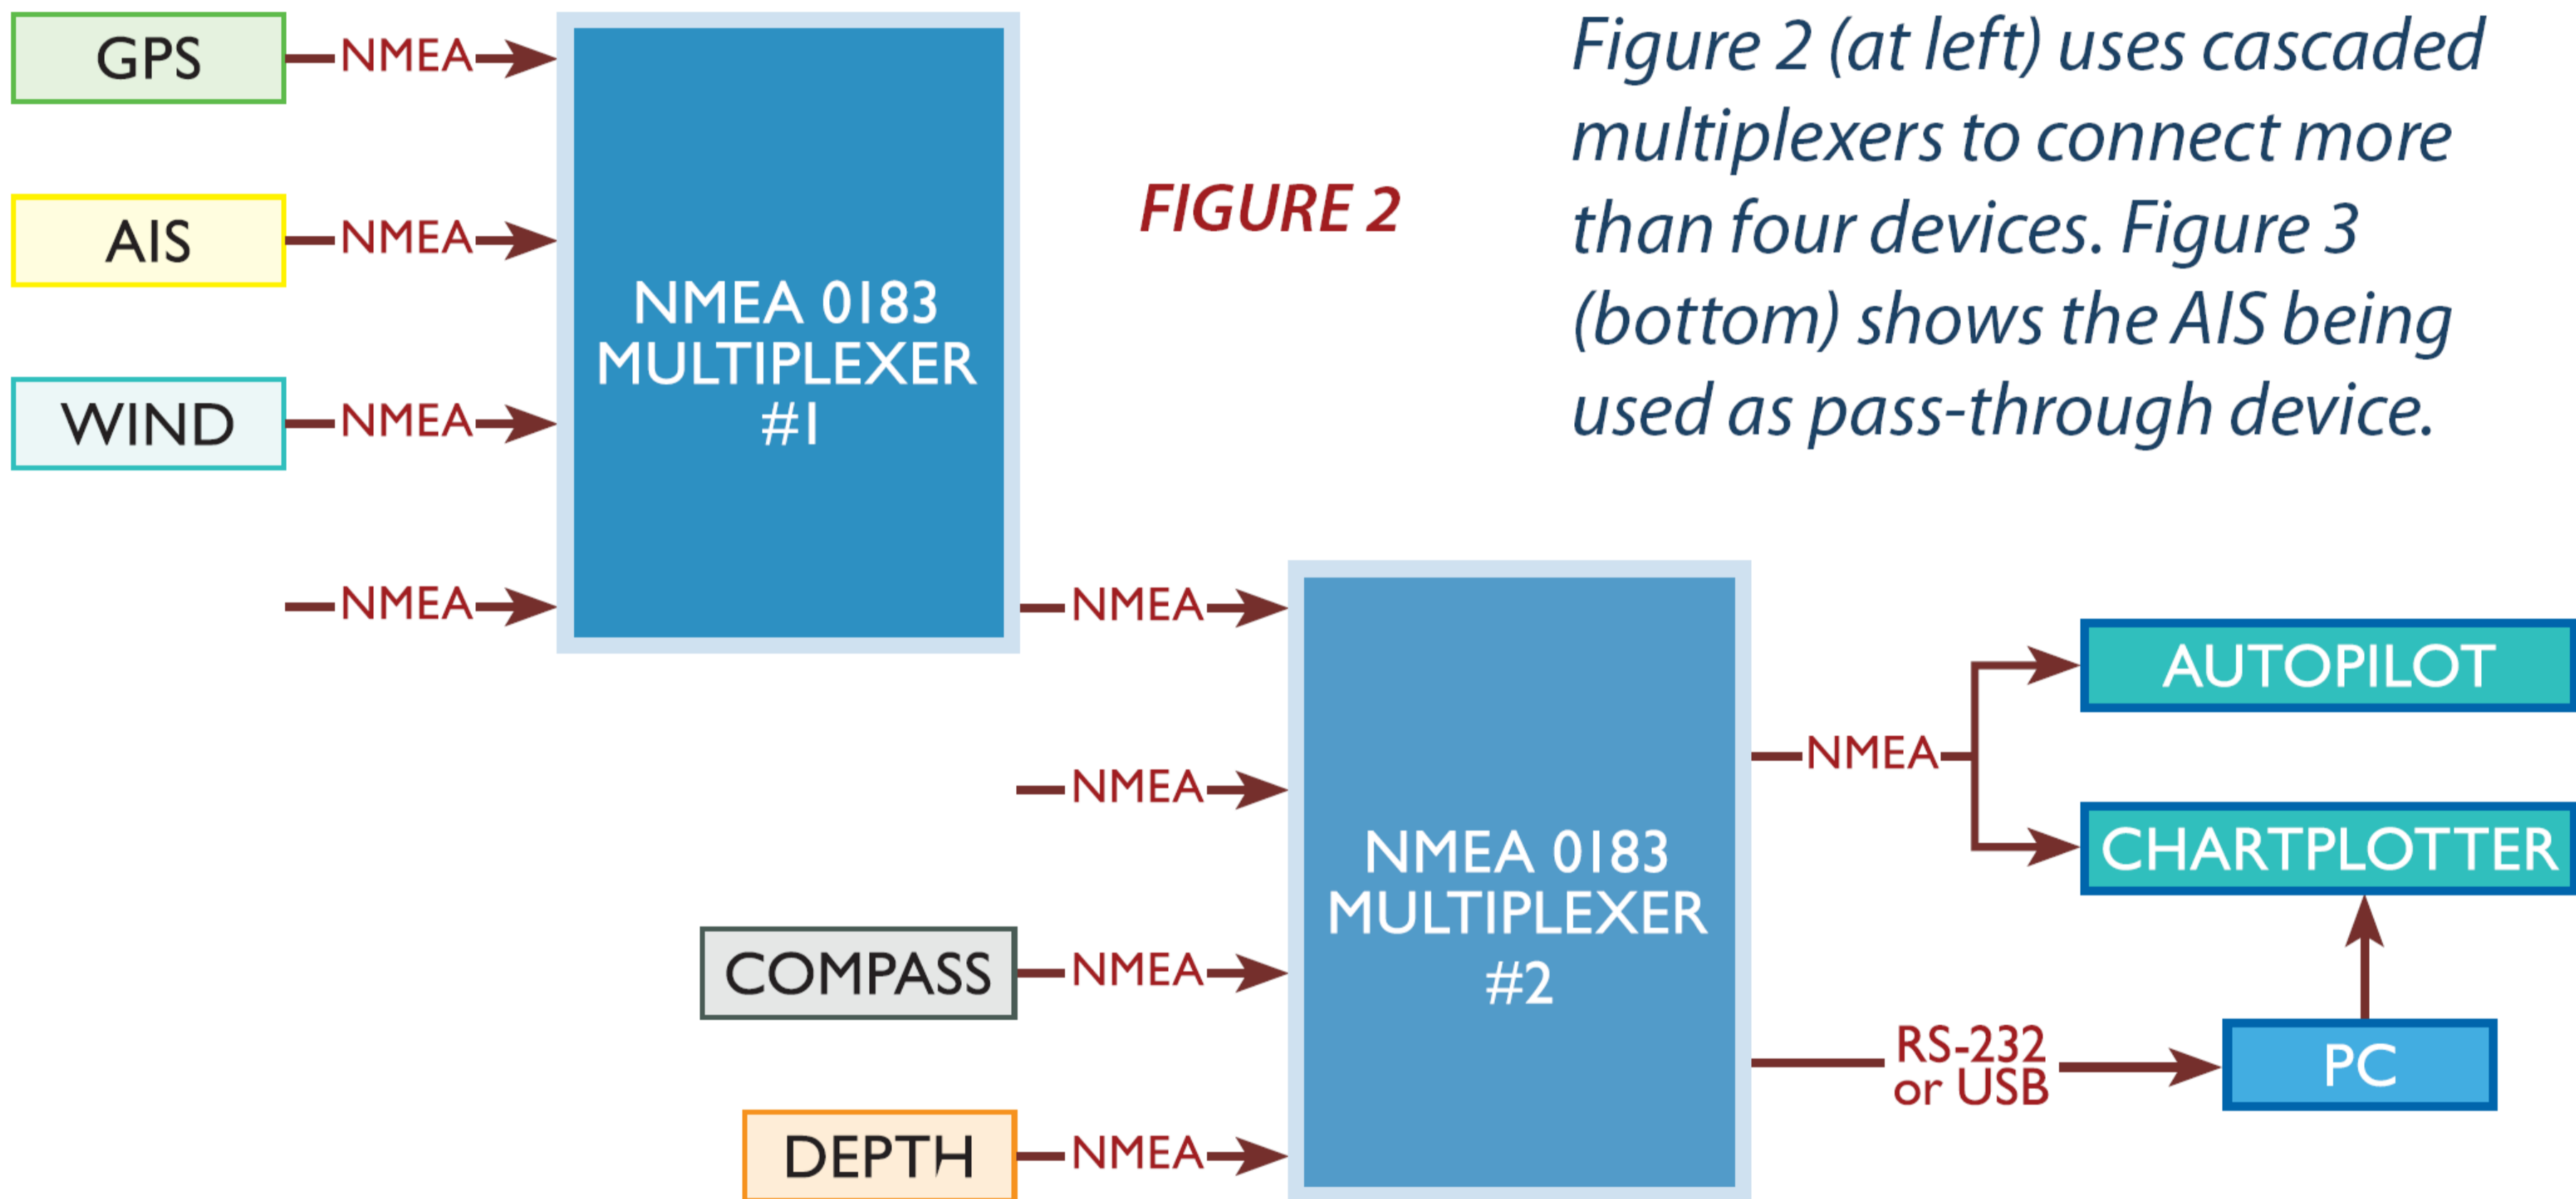


FIGURE 2

FIGURE 3

